



Dome

thetilecompany

Dome Floor



Dome Antracite 600x600 Floor



Dome Ash 600x600 Floor
Dome Ash 600x1200 Floor




Dome Bone 600x600 Floor
Dome Bone 600x1200 Floor



Dome Nut 600x600 Floor
Dome Nut 600x1200 Floor



Dome Wall

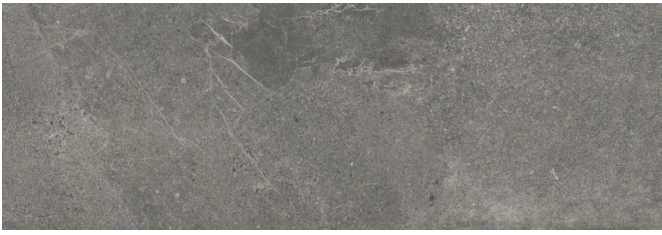

Dome Antracite 300x900 Wall



Dome Ash 300x900 Wall



Dome Bone 300x900 Wall



Dome Nut 300x900 Wall

Dome Decor



Dome Antracite Blind 300x900 Wall Decor



Dome Ash Blind 300x900 Wall Decor



Dome Bone Blind 300x900 Wall Decor



Dome Nut Blind 300x900 Wall Decor

Dome
the**tile**company

Technical Specifications

Type	Use	Made in	Brand	Slip Rating	Variation	Print Faces
Glazed Porcelain	Floors	Spain	Baldocer	R10	V3	32
Glazed Ceramic	Int. Walls	Spain	Baldocer	N/A	V3	24

Packaging

Model	Pieces/Box	m ² /Box	Kg/Box	Boxes/Pallet	m ² /Pallet	Kg/Pallet
600x600	3	1.08	22	48	51.84	1056
600x1200	2	1.44	27.56	40	57.60	1160
300x900	4	1.08	20.5	48	51.84	984

Dome

the tile company

Version	Issue Date	Review Date	Prepared by
1.0	19/05/2026	NA	Stone & Tile Wholesale Limited

Stone & Tile Wholesale Ltd trading as The Tile Company acts as the New Zealand supplier of products covered by this BPIR and is responsible for making product information available under the Building Product Information Requirements Regulations

BPIR

(Building product information requirements) - PAGE 1

Product Name	Dome
Brand	Baldocer
Product Type	Floor (Porcelain) and Wall (Ceramic)
Origin	Spain
Supplier International	Baldocer— Ctra. La Pobla Tornesa—Vall d’Alba. Km4—12192 Vilafames Castellon Spain—+34 964 657 999—Baldocer@baldocer.com
Supplier NZ	Stone & Tile Wholesale Limited— 119B Montreal Street Christchurch—+64 3 962 2383—orders@stoneandtile.co.nz

Products covered under this BPIR include all tiles listed within the Dome collection unless otherwise stated.

Product	Size	Finish	Intended Use
Dome Anthracite	600x600	Matt	Floor
Dome Ash	600x600	Matt	Floor
Dome Bone	600x600	Matt	Floor
Dome Nut	600x600	Matt	Floor
Dome Anthracite	600x1200	Matt	Floor
Dome Ash	600x1200	Matt	Floor
Dome Bone	600x1200	Matt	Floor
Dome Nut	600x1200	Matt	Floor
Dome Anthracite	300x900	Matt	Wall
Dome Ash	300x900	Matt	Wall
Dome Bone	300x900	Matt	Wall
Dome Nut	300x900	Matt	Wall
Dome Anthracite Blind	300x900	Textured	Wall
Dome Ash Blind	300x900	Textured	Wall
Dome Bone Blind	300x900	Textured	Wall
Dome Nut Blind	300x900	Textured	Wall

Intended use

Products covered by this document may be suitable for:

- Interior floor applications
- Interior wall applications
- Residential use
- Commercial use where appropriate
- Wet area applications when correctly installed
- Exterior applications where products are specifically rated for outdoor use
- Access routes where products are selected to satisfy slip resistance requirements

Supporting Documents

Supporting information may include:

- Technical data sheets
- Installation guides
- Slip resistance reports
- Fire performance documentation
- Care and maintenance guides
- Warranty documentation
- Product specifications
- (DOP) Declaration of Performance—Where available

Available upon request or via the Tile Company website www.thetilecompany.co.nz

Durability B2:3.1	Tiles supplied by The Tile Company are designed to provide long-term durability and performance under normal conditions of use. The Tile Company provides a 15-year product warranty subject to warranty terms, conditions, and correct installation practices.
Fire Resistance C3.4 (a) and (b)	Porcelain and ceramic tiles supplied by The Tile Company are inherently non-combustible and offer excellent resistance to heat and fire exposure under normal conditions of use. Where applicable, products may satisfy Group 1-S classifications and Critical Radiant Flux performance criteria under the New Zealand Building Code. Supporting documentation and test reports are available where applicable.
D1 Access Routes D1.3.3	Products identified as Anti-Slip, Structured, Grip, Slip Resistant, or similar may be suitable for applications requiring increased slip resistance. Slip testing may be undertaken using recognised testing methods, with supporting documentation available where applicable. Selection of suitable surfaces remains the responsibility of designers, specifiers, and installers based on intended use and project requirements.
E3 Internal Moisture E3.3.3 E3.3.4 E3.3.5 E3.3.6	Glazed and full-body ceramic and porcelain products supplied by The Tile Company may provide durable and impervious finished surfaces suitable for wall and floor applications. Most products exhibit low water absorption characteristics. Product-specific values are outlined in technical documentation. Where products exceed 6% water absorption: • grout joints should be fully filled • waterproofing systems should be used where required • surfaces should remain free from defects that may compromise moisture performance
F2 Hazardous Building Materials	Porcelain and ceramic products supplied by The Tile Company are not expected to release harmful concentrations of substances or create health hazards under normal use conditions.

Design Limitations

The following design considerations apply:

- Exterior installations should generally use porcelain products or products specifically approved for outdoor applications.
- Frost-prone applications require suitable low-water absorption products.
- Full immersion applications including pools and water features require porcelain products or products specifically approved for submerged use.
- Heavy impacts may chip or crack tile surfaces.
- Products with lower slip resistance classifications may not be suitable for external wet areas, ramps, swimming pool surrounds, commercial kitchens, access routes, or other applications requiring increased slip resistance performance. Product suitability should be assessed against intended use and applicable New Zealand Building Code requirements.

Installation Requirements

Products should be installed:

- by suitably qualified installers
- in accordance with manufacturer recommendations
- to current Australian and New Zealand tiling standards
- following recognised industry practice
- with suitable substrate preparation and waterproofing systems where required

Relevant guidance may include:

BRANZ Good Practice Guide: Tiling

Maintenance Requirements

Regular maintenance is recommended to preserve performance and appearance.

Cleaning should:

- use pH-neutral cleaning products
- avoid harsh acids and abrasive products
- follow The Tile Company Maintenance and Care Guide

Technical Performance Information

Floor

Property	Value
Type	Glazed Porcelain
Thickness	10mm
Water Absorption	≤0.5%
Slip Rating	R10
Frost Resistance	Yes
Shade Variation	V3
Faces	32 (600x600) 16 (600x1200)
Rectified	Yes
Application	Indoor Residential & Commercial Flooring

Wall

Property	Value
Type	Glazed Ceramic
Thickness	10.5mm
Water Absorption	> 10%
Slip Rating	NA
Frost Resistance	No
Shade Variation	V3
Faces	24
Rectified	Yes
Application	Indoor Residential & Commercial Walls